

CYS-E324 E Glass Roving for Chopped Strand Mat

CYS-E324 E Glass Roving for Chopped Strand Mat is compatible with unsaturated polyester(UP), vinyl ester(VE) and epoxy(EP). It is mainly used in the production of powder and emulsion bonded chopped strand mat and also stitched combo mat. It can be used in chopped strand mat, combo mat and chopped core mat producing.

Product Features

- ★ Good choppability and stiffness
- ★ Excellent dispersion
- ★ Good anti-static properties
- ★ Fast wet out in resin




Type of glass	E
Filament diameter (μm)	12
Linear density (tex)	2400

Technical Parameters

Linear Density (%)	Filament diameter (μm)	Moisture content (%)	LOI (%)
±5	12 ±1	≤0.1	1.10±0.15

Storage

Fiberglass roving should be stored in its original packaging in a dry and cool place. Best conditions are at temperatures from 15 to 35°C and humidity between 35 and 65%. To ensure safety and avoid damage to the product, the pallets should not be stacked more than three layers high, when the pallets are stacked in 2 or 3 layers, special care should be taken to move the top pallet correctly and smoothly.

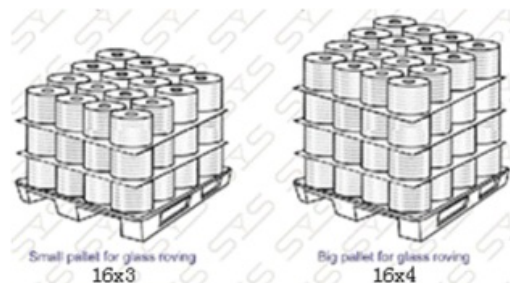

Packaging

The product can be packed on pallet in both small & big size

Package height (mm)	260
Package inside diameter (mm)	80
Package outside diameter (mm)	270
Package weight (kg)	17~19

Number of layers	3	4
Number of rolls per layer	16	
Number of rolls per pallet	48	64
Net weight per pallet (kg)	864	1152

Pallet length (mm)	1140	1140
Pallet width (mm)	1140	1140
Pallet height (mm)	955	1220




E324 无碱 短切毡用合股无捻粗纱

E324是无碱玻璃纤维粉剂和乳剂短切原丝专用合股无捻粗纱，易于短切且分散性能好，适用于增强不饱和聚酯树脂、乙烯基酯树脂和环氧树脂等。

主要用于短切毡、复合毡和夹心毡的生产等。

产品特性

- ★ 短切性好。
- ★ 分散性好，无并条。
- ★ 抗静电性好。
- ★ 树脂浸透性好。

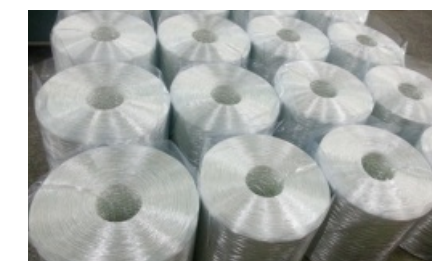


玻纤类型	E
纤维直径 (μm)	12
线密度 (tex)	2400

技术参数

线密度偏差 (%)	纤维直径 (μm)	水份含量 (%)	可燃物含量 (%)
±5	12 ±1	≤0.1	1.10±0.15

存储

在没有特殊要求的情况下，玻璃纤维产品应贮存在干燥、凉爽的环境中，防止受潮，玻纤产品在使用前应始终保持在原包装内。建议保持室内温度平衡，最佳存储条件为温度15°C-35°C，湿度35%-65%。玻纤产品在6个月内使用效果最佳，使用前应保存在原包装内，为确保安全，避免损坏产品，托盘的堆码高度不应超过三层。当堆放两层或三层高时，要求正确地、平稳地移动上层的托盘。

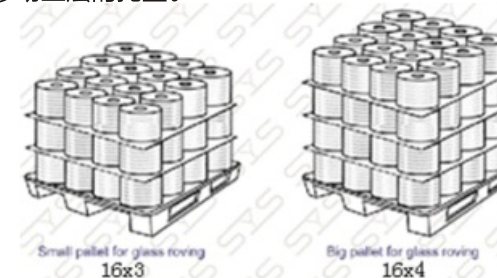

包装

纱线用热塑膜包装，外用纸箱及托盘包装。

纱卷高度 (mm)	260
纱卷内径 (mm)	80
纱卷外径 (mm)	270
纱卷重量 (kg)	17~19

层数	3	4
每层纱卷数量	16	
每托盘纱卷数量	48	64
每托净重 (kg)	864	1152

托盘长度 (mm)	1140	1140
托盘宽度 (mm)	1140	1140
托盘高度 (mm)	955	1220

