

CYS-ECS339G E Glass Chopped Strand for Calcium Silicate Board / Gypsum Board

CYS-ECS339G E Glass Chopped Strand for Calcium Silicate Board / Gypsum Board is available in CYS. The chopped strands is made from special glass fiber which excellent in dispersedness in gypsum slurry. It is used in Plasterboard (Gypsum Board), Calcium Silicate Board and Calcium Silicate Board with microporous production. The chopped strands act as base material and mix with silica flour, cement, lime, etc. E Glass chopped strand is widely used in construction and decoration.

Product Features

- ★ High strength, light weight
- ★ Excellent dispersibility and fast totally mixed with gypsum slurry
- ★ Nonreactive with gypsum and calcium silicate slurry
- ★ Low static
- ★ Good processing characteristics

Technical Parameters

Filament diameter	Chopped length	Moisture content
6~11 μm	12, 24, 30mm	<12%

Storage

If no special requirements, it should be stored in cool and dry place. Don't open the package before using to prevent absorbing moisture.



Type of Glass	E Glass
Product code	CYS-ECS339G
Sizing	Starch

Packaging

There are two kinds of packaging ways

1# Woven bag

Packing	40 kgs/bag
Qty/20' FCL	500 bags
NW/20' FCL	20 tons

2# woven bag + pallet

Packing	40 kgs/bag, 25bags/pallet
Qty/20' FCL	20 pallets
NW/20' FCL	20 tons



Tel: +86-28-84400953
Fax: +86-28-84528597
Cell phone: +86-13908045028

Email: liyibin@169chem.net info@169chem.net
MSN: liyibinle@hotmail.com info@169chem.net
http: //www.169chem.net



CYS-ECS339G 硅酸钙板、石膏板用玻璃纤维短切纱

CYS-ECS339G硅酸钙板用玻璃纤维短切纱是由特殊玻璃纤维经短切制成，在石膏浆料中具有很好的分散性。可用于生产石膏板、硅酸钙板等，作为增强基材与石英粉、水泥、石灰混合，广泛应用于建筑和装饰领域。



产品特性

- ★ 强度高，质量轻
- ★ 优异分散性，能快速与石灰浆料完全混合
- ★ 不与石灰浆和硅酸钙浆料发生反应
- ★ 低静电
- ★ 可加工性好


玻璃类型	无碱
产品型号	CYS-ECS339G
浸润剂	淀粉

技术参数

单丝纤维直径	短切长度	水分含量
6~11 μm	12, 24, 30mm	<12%

存储

在没有特殊要求的情况下，硅酸钙板用玻璃纤维短切纱应贮存在干燥、凉爽的地方，防止受潮，产品在使用前应始终保存在原包装内。建议保持室内温度平衡，最佳存储条件为15~35℃，湿度35~65%。为确保安全，避免损坏产品，托盘的堆码高度不应超过三层。当堆放两层或三层高时，要求正确地、平稳地移动上面的托盘。

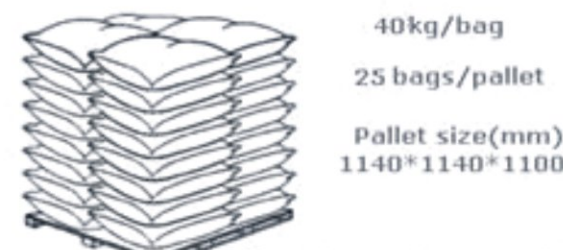

包装

两种包装方式

1# 编织袋包装

包装方式	40 kgs/袋
Qty/20' FCL	500 袋
NW/20' FCL	20 tons

2# 编织袋+托盘

包装方式	40kgs/袋, 25袋/托盘
Qty/20' FCL	20 托盘
NW/20' FCL	20 tons



电话: +86-28-84400953
传真: +86-28-84528597
手机: +86-13908045028

邮箱: liyibin@169chem.net info@169chem.net
MSN: liyibinle@hotmail.com info@169chem.net
网址: //www.169chem.net

